

CPTW Series

Control Power Transformers

Compact and Economical Solutions



www.weg.net | 1-800-ASK-4WEG


VOLTAGE TABLE

| VA | Primary Voltage | Secondary Voltage | Part Number |
|----------------|---|---------------------|----------------|
| 50 | 200/220/440, 208/230/460, 240 x 480 | 110, 115, 120 | CPTW050-GQC-F0 |
| Max Depth | Max Width | Max Height | Mounting Depth |
| 3.23" | 3.00" | 2.79" | 2.00" |
| Mounting Width | Mounting Hole Depth | Mounting Hole Width | Phase |
| 2.50" | 0.20" | 0.41" | 1 |
| Frequency | Shipping Weight | Voltage Group | |
| 50/60 Hz | 2.60 lbs. | G | |

Notes:

- Jumper Link and Fuse Clip height not included
- Add 5/16" to the Depth (A) when fuse clips are included (50 thru 350VA)
- Add 1 3/8" to the Height (D) when fuse block is included (1, 2, and 3 poles) (50 thru 350VA)
- Add 1/2" to the Height (D) when fuse block is included (1, 2, and 3 poles) (500 thru 5000VA)

DIAGRAM

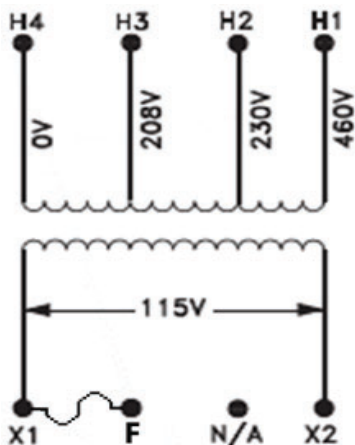

SPECIFICATIONS

- Class 130°C (266°F) insulation system with 55°C (131°F) temperature rise.
- All transformers up to 750VA come with pre-installed secondary fuse kits, ready to accept 13/32" x 1 1/2" midget or Class CC fuses.
- Two parallel jumper links come standard with transformers with dual primary voltages.
- All transformers up to 3kVA include a built-in mounting adapter for fuse blocks.